

INSTRUCTIONS FOR USB POWER STRIP RETRO-MOUNT

FOR TOWER OR CORE
8/10, 12/16, OR 18/20

POWER SUPPLY:

100 - 250 VAC 50/60


Hz Output of up to 2.1A

per port for sleep and

charge. For devices with

maximum power supply

of 45W or less.

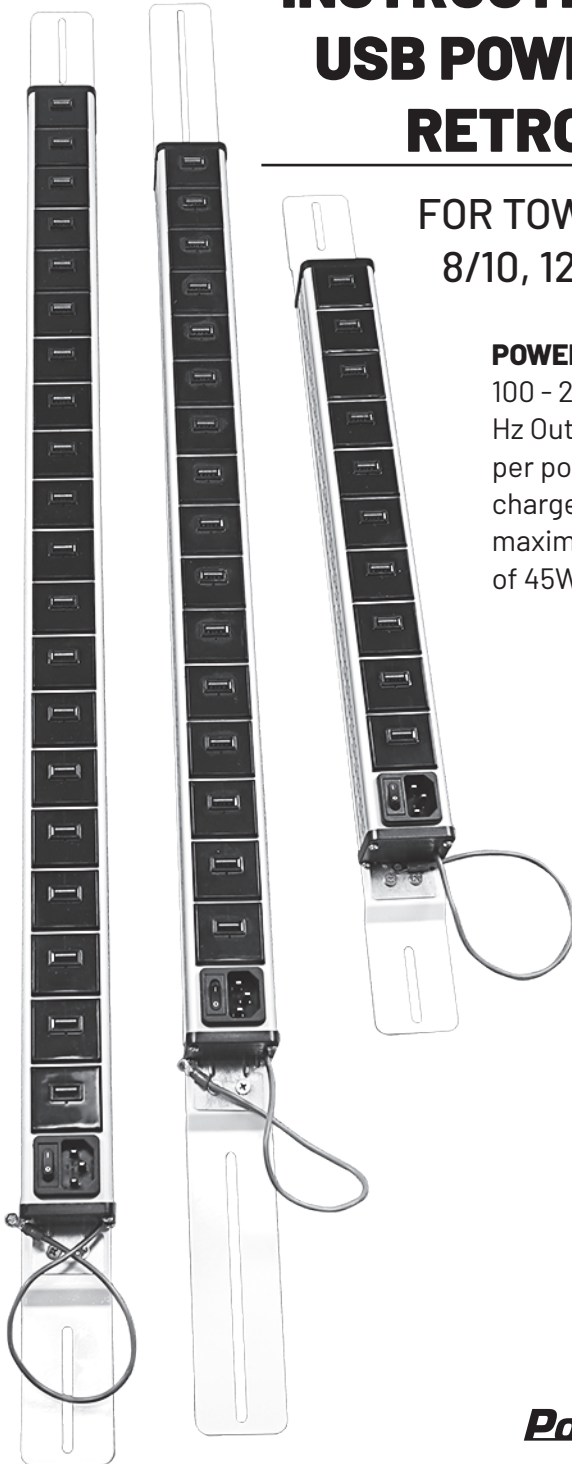

WARNINGS



WARNINGS

Please read the warnings below for important safety information regarding your product. Failure to read these warnings or to follow the instructions below could result in personal injury or damage to your product that could void its warranty.

- **DO NOT PLUG POWERGISTICS TOWERS INTO OTHER TOWERS. MUST BE PLUGGED DIRECTLY INTO THE WALL OUTLET.**
- **WALL MOUNTED TOWER MUST HAVE THE BASE RESTING ON THE FLOOR.**
- **SHELF WEIGHT RATING: 5 LBS PER SHELF.**



In its unassembled state, small parts present a hazard.



Must be assembled by an adult.



Ensure that any cables extending across the floor to your product are properly bundled and marked to avoid tripping or falling which may lead to personal injury.



Do not install or use the electrical components of this unit during a lightning storm.



This product is intended for indoor use only. To reduce the risk of fire or electric shock, do not expose this product to rain or moisture. The internal components are not sealed from the environment.



Do not climb on, hang from or suspend objects from any components of your product unless otherwise specified.




Read your power strip's electrical specifications. Only plug in to devices that are approved for use with this power strip. Connect the supplied power strip directly to a wall outlet. The socket-outlet shall be installed near the equipment and shall be easily accessible. Do not connect to another power strip or use an extension cord. Unplug when not in use.



Read the electrical specifications of any electronic equipment you are using with your PowerGistics products. Failure to read these specifications and follow their instructions could result in damage to your equipment or personal injury.

Removing power cord from grommet

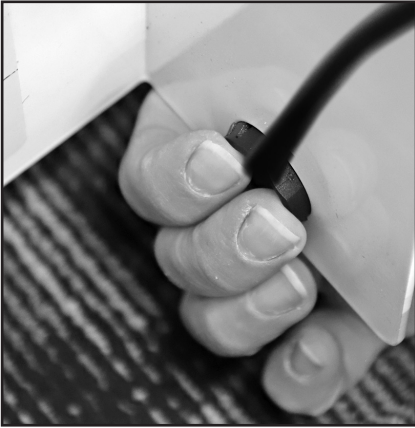


1. Push out the grommet from power cord hole in base of Tower.



2. Widen the opening in the grommet and remove the power cord.



3. Save grommet for later use.

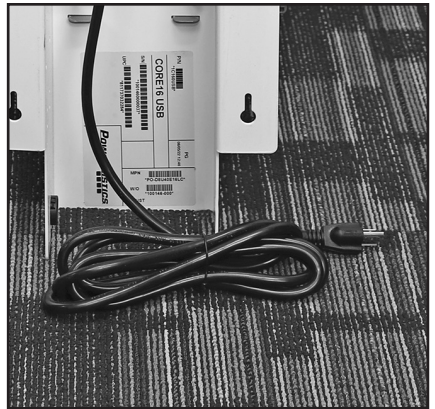


4. Ready power cord for power strip removal.

Standard Power Strip #1 (with wide vertical plugins)



1. Remove nut and remove the ground wire.

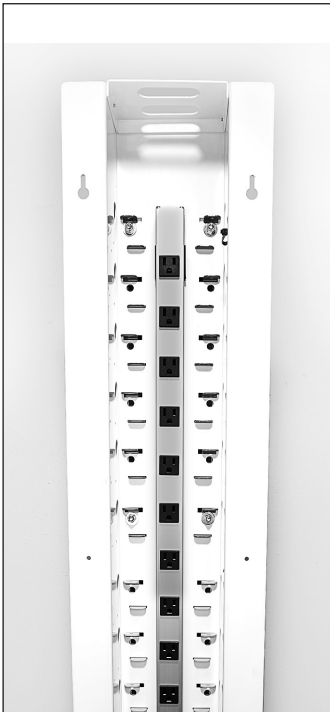

2. Pop off the standard power strip from the brackets.




3. Use a screwdriver to remove the brackets from the top and bottom of the Tower spine.

Standard Power Strip #2 (with narrow horizontal plugs)



1. Remove nut and remove the ground wire.

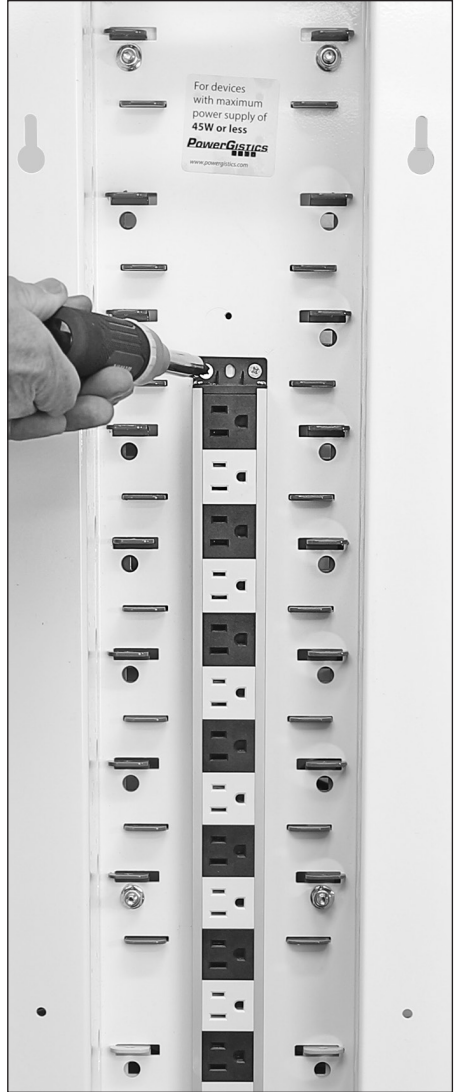

2. To remove the power strip, use a Phillips screwdriver to remove the screws at the top and bottom.

Attach USB power strip



1. Screw the new power strip to the spine at the top and bottom.



Attach grounding wire



2. Screw the ground wire into the screw on the side of the spine.




Attach power cord



1. Plug in the power cord to the power strip.



2. Widen the opening in the grommet and feed the power cord through.

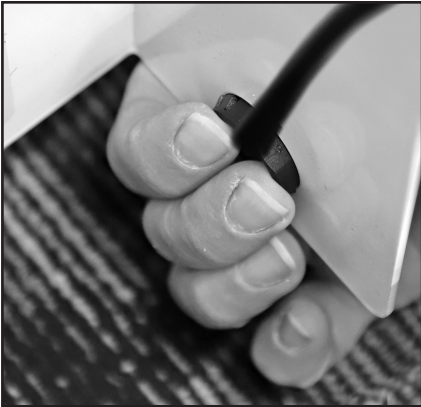

3. Reinsert the grommet into Tower base hole.
Plug power cord into wall outlet.

PowerGISTICS
■■■■

100 Continental Drive, Columbus, Wisconsin 53925 USA
201-389-9940 | www.PowerGistics.com